



KIP 75 SERIES

SPECIFICATIONS



General

| | |
|------------------------------|--|
| Description | Monochrome wide format print/copy/scan with color scanner |
| Type | Electrophotography (LED) with organic photoconductor (OPC) and closed toner system |
| Range of Productivity | 10 D or 8 D per minute / 600 or 480 prints per hour |
| Warm Up Time (from cold) | Less than 2 minutes from standby |
| Configurations | Printer / MFP |
| Roll Options | 2 Roll or 4 Roll |
| Output Delivery | Top / Optional Rear |
| Dimensions | 63" (w) x 29" (d) x 63" (h) / 1600 mm x 720 mm x 1600 mm |
| Weight | MFP (4 Roll) 624 lb. / 283 kg Printer (4 Roll) 587 lb. / 266 kg |
| Electrical Requirements | 220V-240V +6% or -10%, 50/60Hz, 13A |
| Power Consumption (Standby) | 430W |
| Power Consumption (Printing) | < 1,500W |

Printer

| | |
|---------------------|---|
| Print Resolution | 600 dpi x 2400 dpi |
| Roll Capacity | 2 Roll or 4 Roll |
| Output Sizes Width | 11" - 36" |
| Output Sizes Length | 20' / 6 m (standard), 500'/150 m based on media validation |
| Paper Weight | Bond 18-24 lb., Vellum/Translucent Bond 18-20 lb., film 3.5 - 4 mil |
| Media Type | Bond / Vellum / Film |

Controller

| | |
|---------------------|---|
| Controller Type | KIP System K Controller with Windows 7 Embedded |
| Memory | 2GB DDR3 Standard - Upgradable to 4 GB |
| Hard Drive | Minimum 320 GB - Unlimited Upgrade |
| Supported File Type | DWF, PDF, PDF-A, HPGL 1/2, HP-RTL, Calcomp 906/907, CALS Group 4, TIFF Group 4, CIT/TG4, Grayscale TIFF, TIFF Packbits, PNG, JPEG |

Scanner

| | |
|---------------------|---|
| Scanner Type | CIS / CCD |
| Scan Resolution | 600 dpi |
| Scan Format | TIFF, Multipage TIFF, PDF, PDF-A, Multipage PDF, DWF, JPEG |
| Scan Destination | Local USB (removable media), Mailboxes (local), FTP, SMB Cloud: Google Drive/Dropbox/Box/OneDrive/SharePoint |
| Original Size Width | 11" - 36" / 210 mm to 914 mm |
| Original Thickness | 0.05 mm - 1.60 mm (image quality over 0.25 mm not guaranteed) |

KIP 75 SERIES




INSTALLATION

Space, Electrical, and Environmental Requirements


| | |
|------------------------|---|
| Weight | MFP (4 Roll) 624 lb. / 283 kg Printer (4 Roll) 587 lb. / 266 kg |
| Dimensions | 63" (w) x 29" (d) x 63" (h) / 1600 mm x 720 mm x 1600 mm |
| Electrical (Dedicated) | 220V-240V +6% or -10%, 50/60Hz, 13A |
| Electrical Receptacle | Nema 6-20 R |
| Max. Power Consumption | < 1,500W (printing), 430 W (standby) |
| Acoustic Noise | Idle: max. 50 db Printing: max. 57 db |
| Room Temperature | 50-86°F (10-32°C) |
| Room Humidity | 15-85% (non condensing) |

Spatial Requirements (top view not to scale)

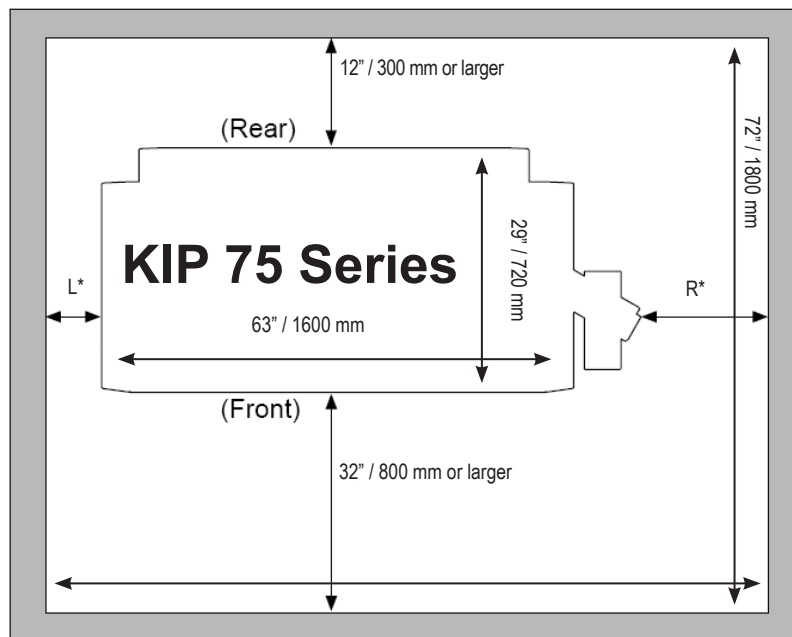


* L + R = 14" / 350 mm or larger
(R must be larger than L)
(L = 2" / 50 mm or larger)

Spatial Requirements with KIPFold 1000 (top view not to scale)

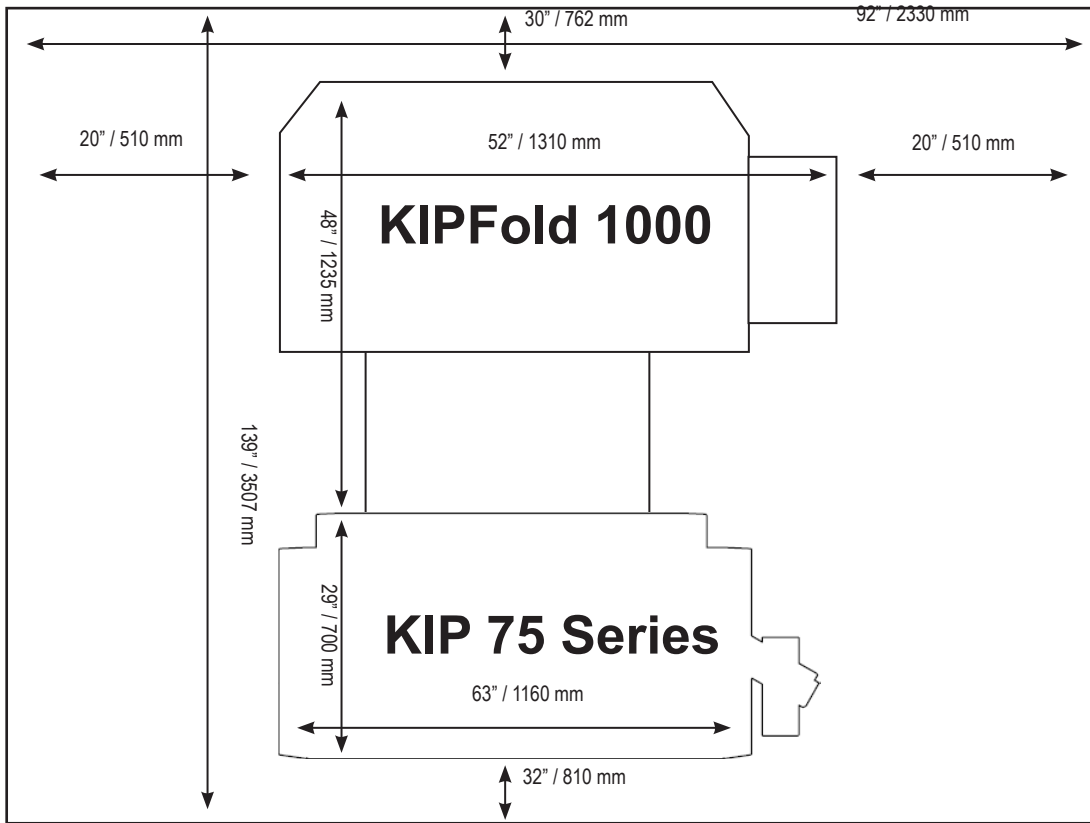


Spatial Requirements with KIPFold 2800 (top view not to scale)

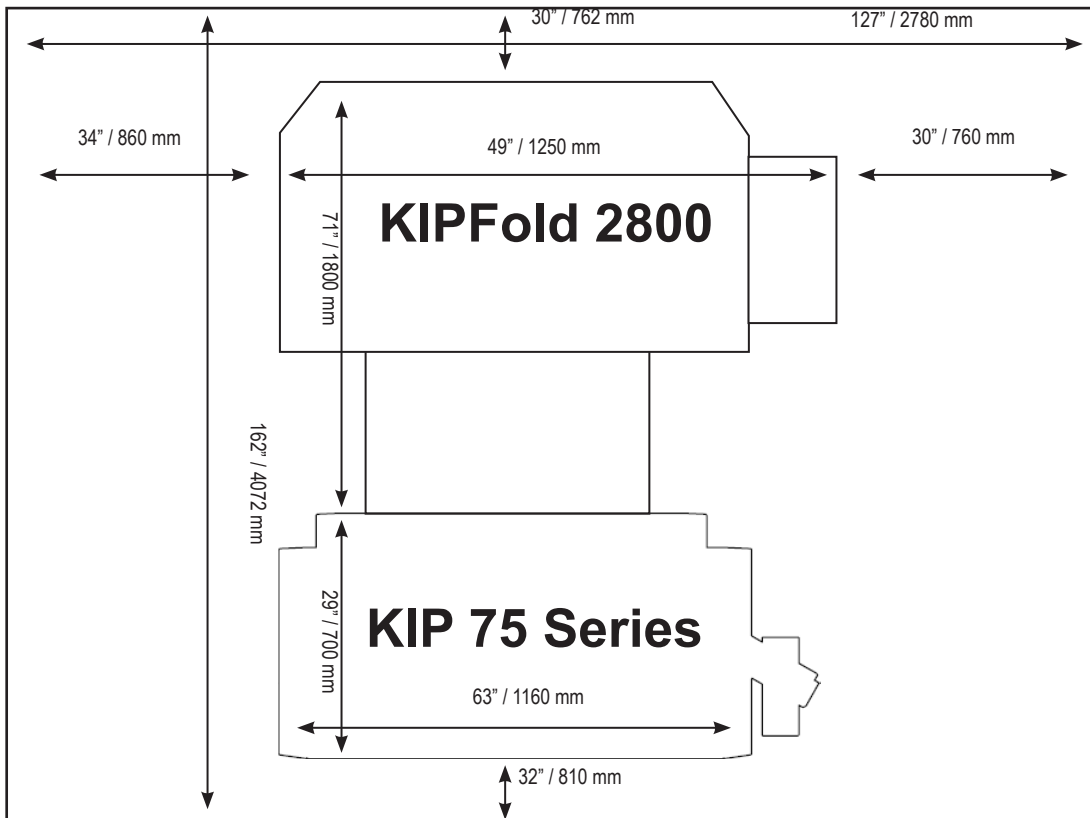


KIP 75 SERIES


CONFIGURATIONS & PRODUCTIVITY



480 PRINTS PER HOUR




KIP 7572 Printer




KIP 7574 Printer




600 PRINTS PER HOUR




KIP 7572 Printer




KIP 7574 Printer




KIP 7582 MFP CIS Scanner



KIP 7584 MFP CIS Scanner



KIP 7582 MFP CIS Scanner



KIP 7584 MFP CIS Scanner

KIP 7592 MFP CCD Scanner*

KIP 7594 MFP CCD Scanner*

KIP 7592 MFP CCD Scanner*

KIP 7594 MFP CCD Scanner*

**Requires Dual Footprint Scanner Stand*



KYOCERA Document Solutions America, Inc.
 Headquarters: 225 Sand Road, Fairfield, NJ 07004-0008, USA
 ©2019 KYOCERA Document Solutions America, Inc.

KIP is a registered trademark of the KIP Group. All other product names mentioned herein are trademarks of their respective companies. All product features and specifications are subject to change without notice. Complete product specifications are available upon request. © 2018